


# Aerial Distribution Node Box LCAPC

## 1x8 Splitter

### Product Image

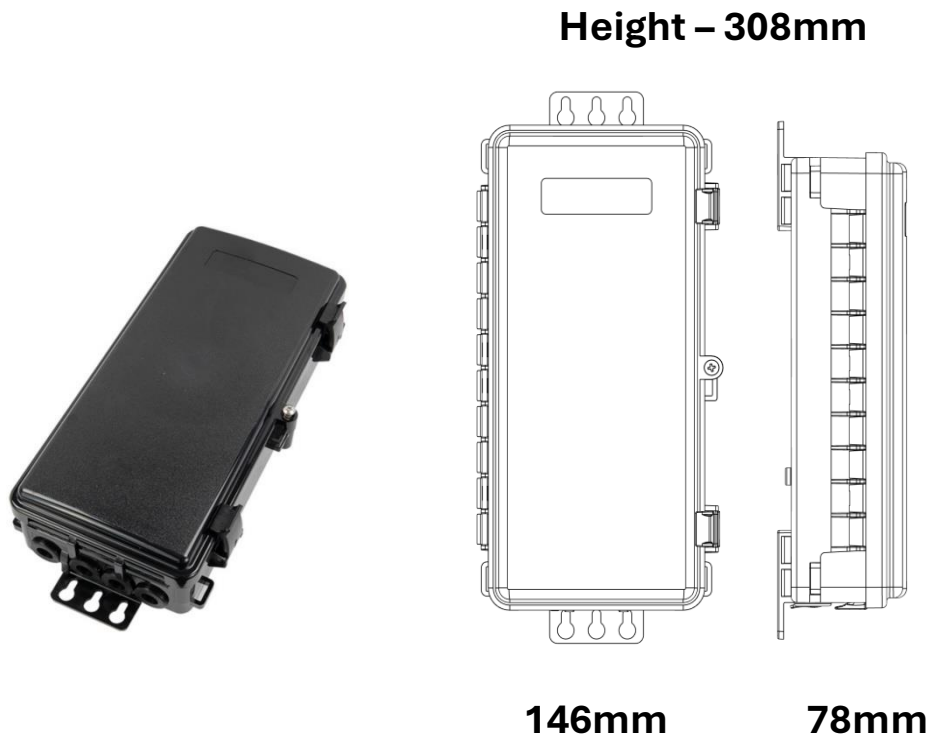

### Product Description

The Aerial Subscriber Node is developed to provide a separation between the network build and the customer drop. Housing the drop connectors within the ASN ensures that optical connectivity is both cost effective and secure.

Optimised for fast deployment, the closure can be supplied as standalone unit ready for splicing or as a pre-tailed closure ready for faster rollouts.

Pre-terminated connectorised drop cables can then be installed at a later date without the risk of access to the delicate 250um fibres. Up to 24 drop cable customer connections can be offered from a single enclosure.

## **Features**

Custom branding available

Impact resistant enclosure

High-quality hinge mechanism

Durable sealing clips

Up to 24 customer connections

4 x Multifibre entry Ports

24x Drop cable Ports

IP55

Secure, tamper proof cover

Low profile

Dimensions – 146W x 305H x 78D (mm)

Connection Type – SC or LC

Max. Cable Capacity 144F Storage 24F Splice 24F Patch

Cable Dimensions – 5-14mm Input/3-5mm Drop