




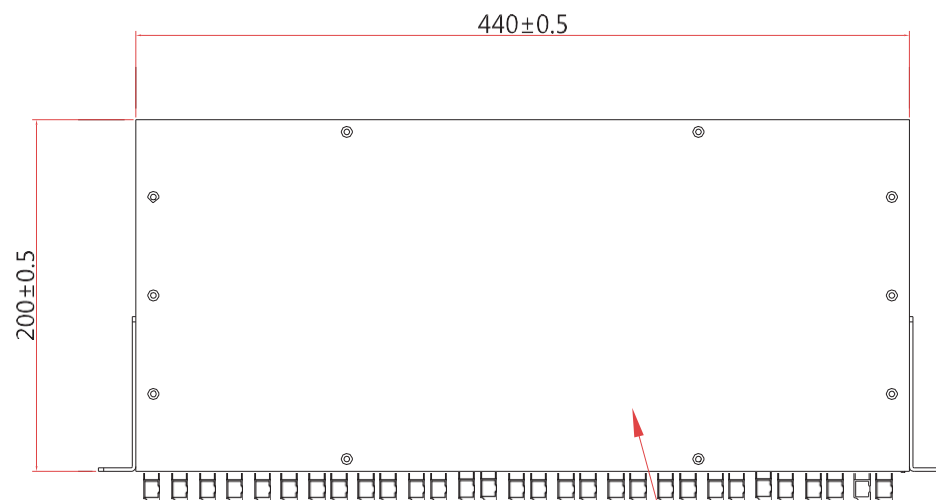


24pcs 1*4 blockless PLC splitter

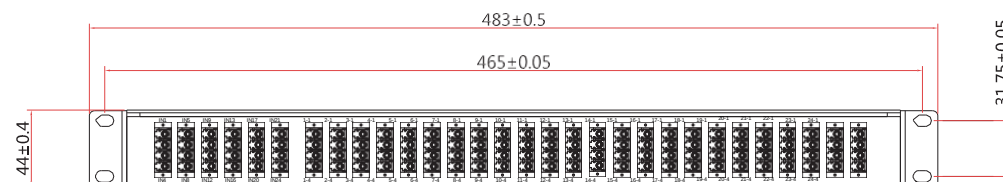

Optical specifications	
Operating Wavelength (nm)	1260-1650nm
Optical fiber type	G657A2
Insertion Loss(IL)	≤7.4dB
Uniformity(dB)	≤0.7dB
Porlarization dependent loss(dB)	≤0.3dB
Return Loss(dB)	≥55 dB
Directivity(dB)	≥55dB
Operation Temperature	-40~85 ℃
Storage Temperature	-40~85 ℃

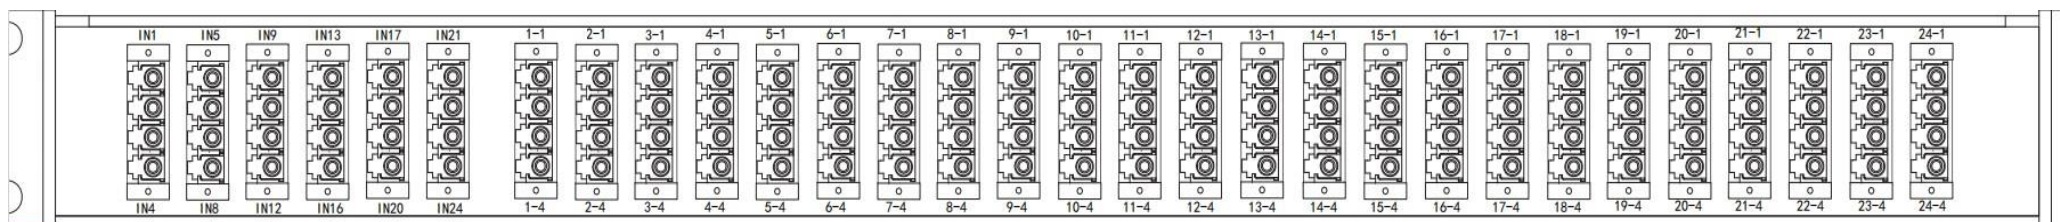

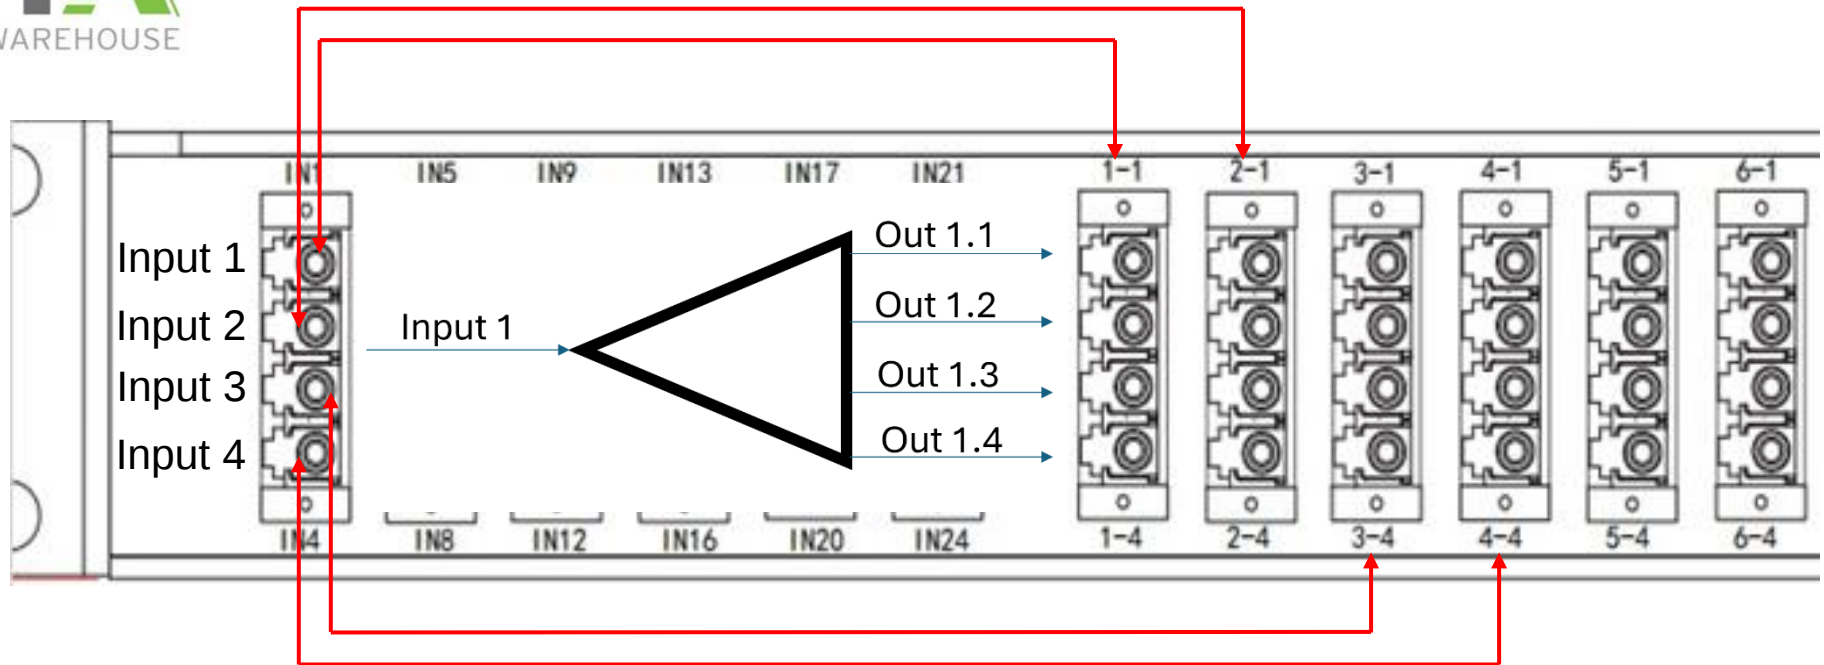

Input 1-24

Output 1-96

